

# PowerWalker VI 600

Line-Interactive UPS System

600VA Line- Interactive UPS

4x Schuko outlets


Build-in USB & RS-232 Communication Port

Discharge, Overcharge and Overload Protection

Slim and compact design



Item-No. 10120025

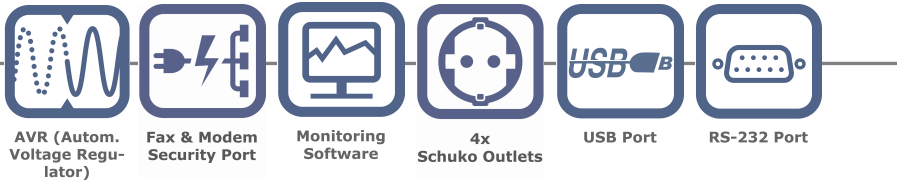

## Product Features

The PowerWalker VI 600 provides high performance, reliable and cost-effective backup power protection. It also equipped DC start function and overload protection. The PowerWalker VI 600 is the ideal solution for all day to day computing.

- Microprocessor control guarantees high reliability.
- Wide Input Voltage Range
- Equipped with boost to stabilize input voltage
- Build-in DC Start Function enables UPS to be started up without AC power supplied
- Auto restart while AC recovery
- Provides modem/Phone line surge protection
- Slim and compact design
- Wall mountable



## Technical Details

### Product Features

<b>Capacity</b>	600VA / 360W
<b>Input Voltage</b>	220/230/240VAC
<b>Input Voltage Range</b>	162-290VAC
<b>Frequency</b>	45-65Hz (Auto Sensing)
<b>Output Voltage</b>	220/230/240VAC
<b>Voltage Regulation (Battery Mode)</b>	+/- 10%
<b>Output Frequency</b>	50Hz or 60Hz
<b>Frequency Regulation (Battery Mode)</b>	+/- 1Hz
<b>Output Waveform</b>	Sinewave (line mode) Stepwave (battery mode)
<b>Transfer Time</b>	4-6ms (13ms max)

### Battery

<b>Type</b>	12V / 7Ah
<b>Quantity</b>	1x
<b>Recharge Time</b>	6h for 90% after complete discharge

### LED Indicators

<b>AC Mode</b>	Green LED lighting
<b>Backup Mode</b>	Green LED flashing

### Audio Indicators

<b>Backup Mode</b>	Beep every 10 seconds
<b>Low Battery</b>	Beep every second
<b>Overload</b>	Beep every 0.5 second

### Full Protection

<b>Discharge</b>	Yes
<b>Overcharge</b>	Yes
<b>Overload</b>	Yes

### Connections

<b>Interface</b>	USB, RS-232
<b>Outlets</b>	4x SCHUKO

### Software & System Requirements

<b>Software</b>	WinPower
<b>Operating System</b>	For details visit: <a href="http://www.powerwalker.com/winpower.html">www.powerwalker.com/winpower.html</a>

### Product Details

<b>Dimensions</b>	290mm x 210mm x 110mm (DxWxH)
<b>Colour</b>	Black
<b>Wall Mount</b>	Yes
<b>Weight</b>	6.1kg
<b>Model Code</b>	VI 600

### Environment

<b>Temperature</b>	0°C – 40°C
<b>Humidity</b>	0% - 90% (non- condensing)

### Package Content

<b>Package Content</b>	PowerWalker VI 600, printed manual
------------------------	------------------------------------

### Logistic Data

<b>Giftbox Language</b>	EN/DE/FR/ES/IT/PT/SE/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KZ/CS
<b>Manual Language</b>	EN/DE/FR/ES/IT/PT/SE/FI/NO/TR RU/UA/BY/PL/CZ/HR/HU/BG/KZ/CS
<b>Dimension/Giftbox</b>	335mm x 142mm x 265mm (DxWxH)
<b>Weight/Giftbox</b>	6.3kg
<b>Dimension/carton</b>	600mm x 349mm x 285mm (DxWxH)
<b>Weight/carton</b>	25.2kg
<b>PSchukoes/carton</b>	4
<b>BlueWalker Item-No.</b>	10120025
<b>EAN</b>	4260074970456
<b>Warranty</b>	24 Months (except battery)

Use UPS configurator on [www.powerwalker.com](http://www.powerwalker.com) for detailed backup time information.